
LED 显示屏前维护工具规格书

LED display front maintenance tool Description

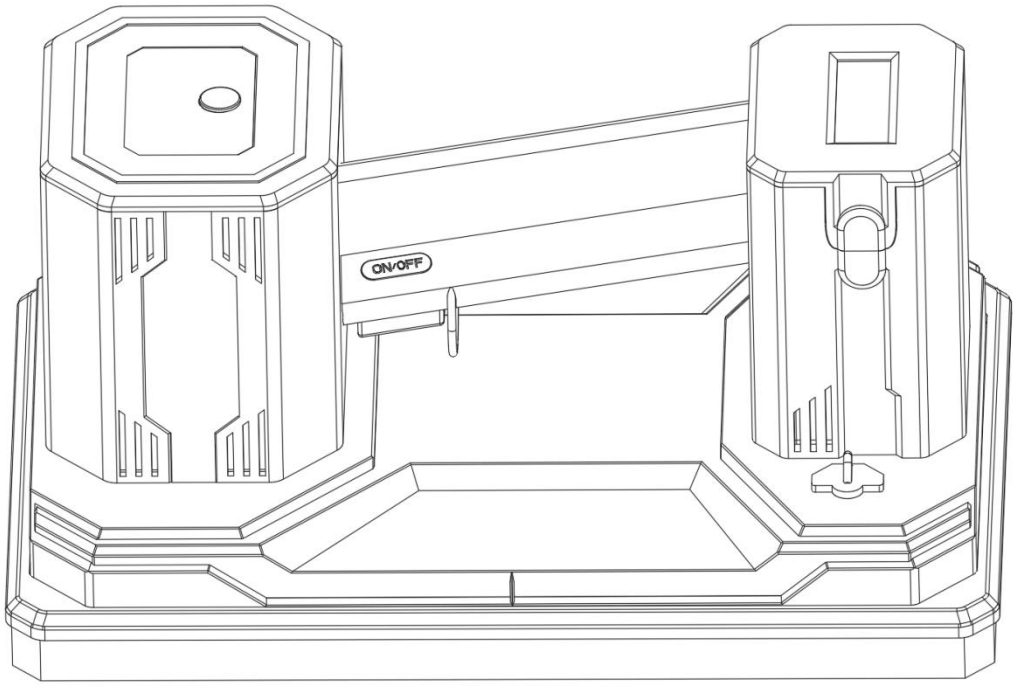

地址：深圳市宝安区石岩镇塘头工业区三栋五楼 TEL：0755-23071005 FAX:0755-23071009

工具参数

Tool parameter

充电器充电电压：100-240V

Charger charging voltage: 100-240V

充电器输出电压：25.2V

Charger output voltage: 25.2V

锂电池能量：54Wh

Lithium battery energy:54Wh

最大持续充电电流：25.2V-1000mA

Maximum continuous charging current: 25.2V-1000mA

工作环境：-10-45℃　15%-85%RH

Working environment: -10-45℃　15%-85%RH

充电时长：2 小时

Charging time：Two hours

工具规格

Tool description

长宽高：250*160*123MM


L*W*H: 250*160*123MM


吸盘尺寸：250*160 MM

Suction cup size: 250*160MM

产品示意图

Product schematic

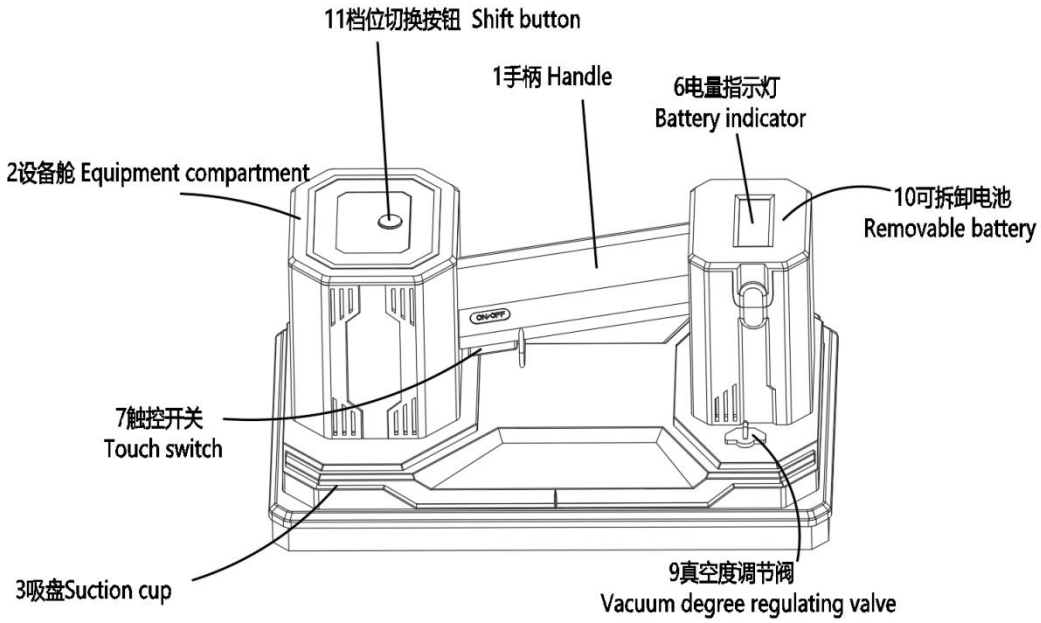

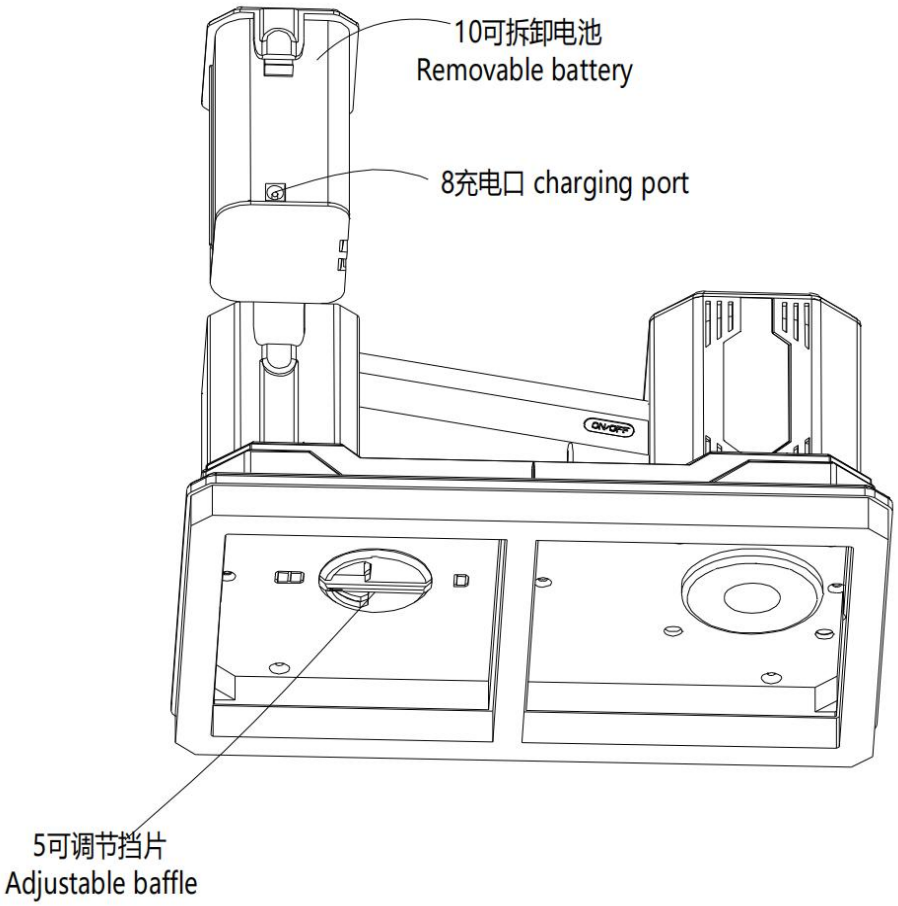

1 手柄 Handle　　2 设备舱 Equipment compartment

3 吸盘 Suction cup


4 密封圈 seal ring　　5 可调节挡片 Adjustable baffle

6 电量指示灯 Battery indicator


7 触控开关 Touch switch　　8 充电口 charging port

9 真空度调节阀 Vacuum regulating valve

10可拆卸电池 Removable battery　　11档位切换按钮Shift button

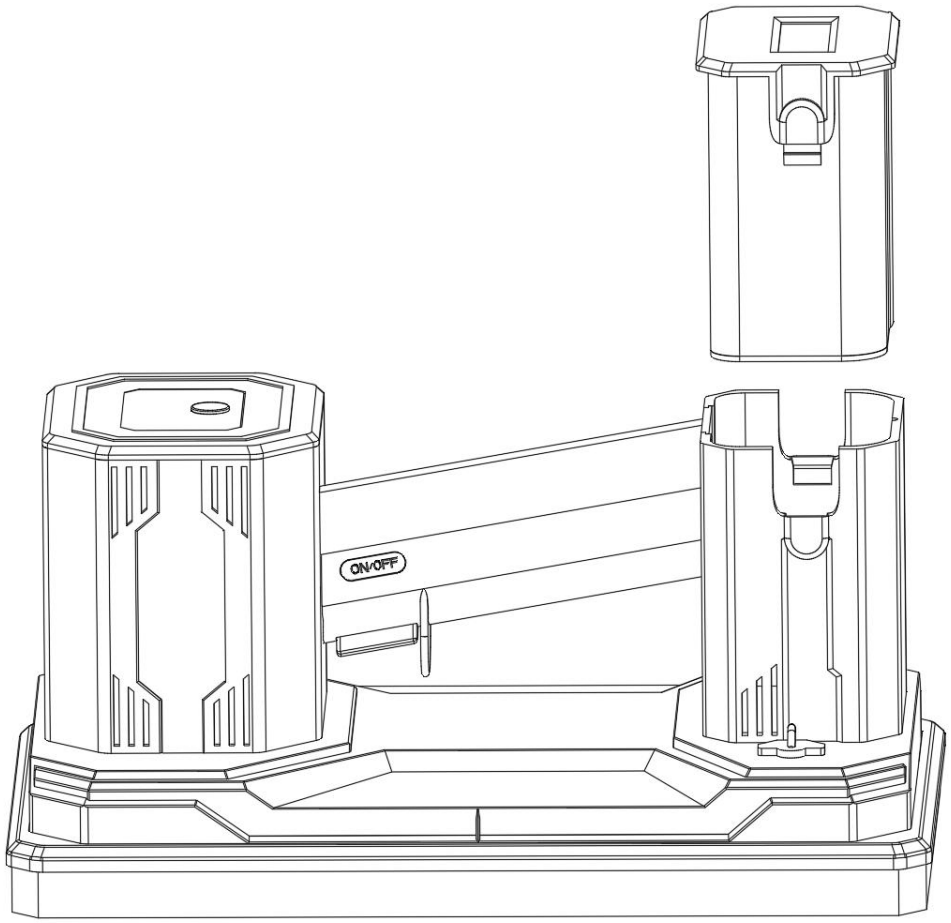

地址：深圳市宝安区石岩镇塘头工业区三栋五楼 TEL：0755-23071005 FAX:0755-23071009

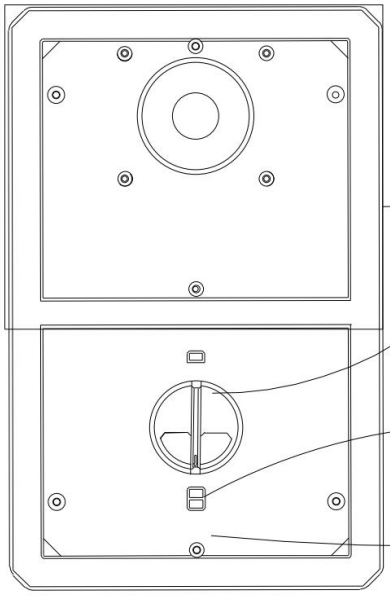

箭头指示此方向时，为上半部分吸盘工作，下半吸盘无吸力，用于小模组吸取。
When the arrow indicates this direction, the upper half of the suction cup works, and the lower half of the suction cup has no suction force, which is used for small module suction.

吸盘模式指示箭头 Suction Cup Mode Indicator Arrow

箭头指示此方向时，整个吸盘工作，用于常规模组吸取。
When the arrow indicates this orientation, the entire suction cup works for regular module suction.

充电器参数及示意图


Charger parameters and schematic diagram

型号：CH0251-2521000F

Model: CH0251-2521000F

参数：输入:AC100～240V 50/60Hz　输出:DC25.2V 1000mA

parameter：Input:AC100～240V 50/60Hz　Output:DC25.2V 1000mA

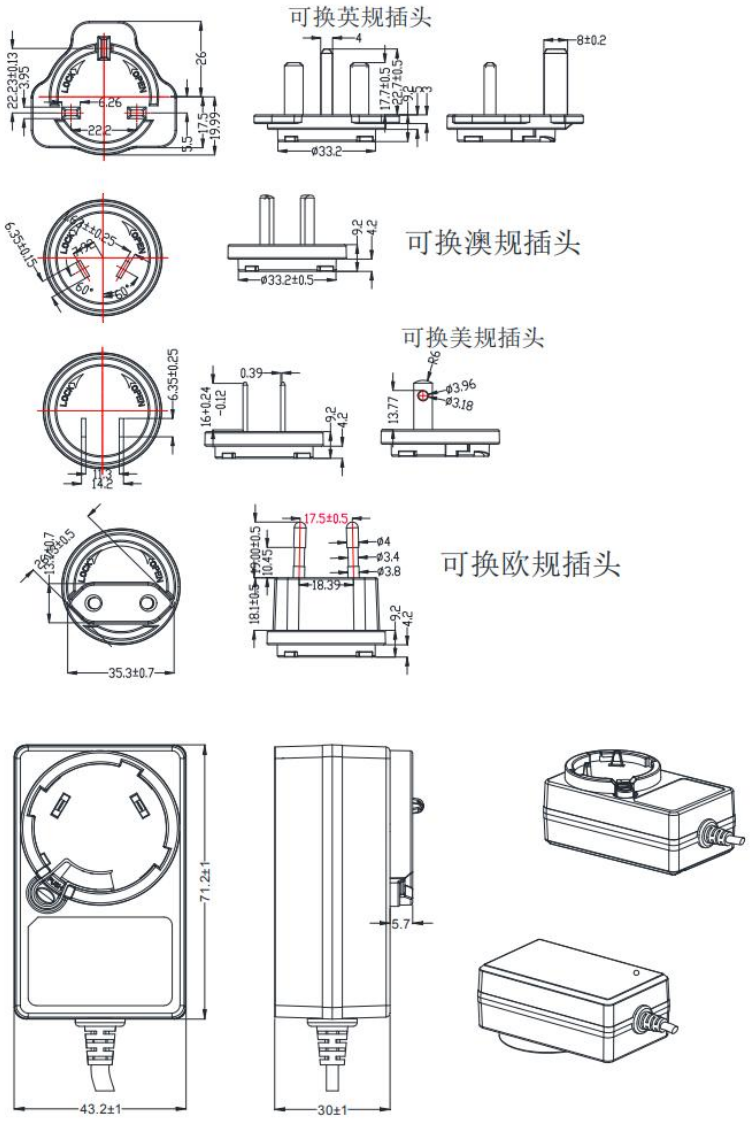

保修政策

Warranty policy

正常使用，整机质保两年。

Normal use, machine warranty for two years.

1、吸入杂物、淋雨泡水、高空跌摔、私自拆解工具等人为损坏不在保修范围内。

1. Inhalation of debris, soaking in the rain, falling at high altitude, private dismantling tools and other artificial damage is not covered by the warranty.

2、因未使用标配充电器造成的工具烧毁，不在保修范围内。

2. The tool burned due to not using the standard charger is not covered by the warranty.

3、因充电环境变化和使用频率的不同，电池寿命会存在合理损耗，正常的电池寿命损耗不在保修范围内。

3. Due to changes in the charging environment and different frequency of use, there will be reasonable loss of battery life, and normal battery life loss is not covered by the warranty.

4、吸盘内有产品二维码身份标签及防撕镭射标签，两个标签一旦损坏，产品将不再保修。

4. The tool has the product QR code identity label and anti-tear laser label, once the two labels are damaged, the product will no longer be guaranteed.

包装方式

Packing way

包装材质：纸箱+泡棉

Packing material: carton + foam

单个包装规格：长*宽*高=320mm*245mm*193mm

Single package specifications:

Length * width * height =320mm*245mm*193mm

大箱包装规格：1 装 6PCS 长*宽*高=750mm*345mm*415mm

Big carton box packing specification:

1 pack 6PCS length * width * height =750mm*345mm*415mm



装箱配置表

装箱配置明细 Package detail	数 量 Quantity	规 格 Description
工具主机 Tool main engine	1 台 One set	150W/350W 双档位 150W/350W double gears
电池 Battery	1P 1pcs	18650 6S1P 2500mAh
充电器 Charger	1P 1pcs	输入 100-240V 输出 25.2V-1000mA Input100-240V,output25.2V-1000mA
安全绳 Safety rope	1P 1pcs	/
背包 backpack	1P 1pcs	/
说明书 Instruction manual	1P 1pcs	/